


UNDER BEAM LIFT™ (UBL™)

Lightweight Lift Axle Mechanism

The compact, lightweight UNDER BEAM LIFT™ (UBL™) raises your profitability by delivering flexibility and reliability

Hendrickson's UNDER BEAM LIFT™ (UBL™) kits allow fleets and owner-operators to put the advantages of INTRAAX® and HT™ Series to work in their liftable applications. Liftable axles offer operational flexibility, extend tire life, improve trailer maneuverability, allow vehicles to carry more payload and can even save on road tolls. The UBL is a sturdy, lightweight and easy to install lift mechanism. When combined with INTRAAX, UBL provides the lightest integrated lift system available today, increasing your productivity and profitability.

AANL UBL is the latest addition to the Hendrickson UBL product line. This UBL features a self-locating, bolt-on frame bracket mount that eases installation by eliminating tedious positioning and labor intensive welding. It is also compatible with corrosion protective frame bracket coating options, allowing you to spec our galvanized coating option as well.

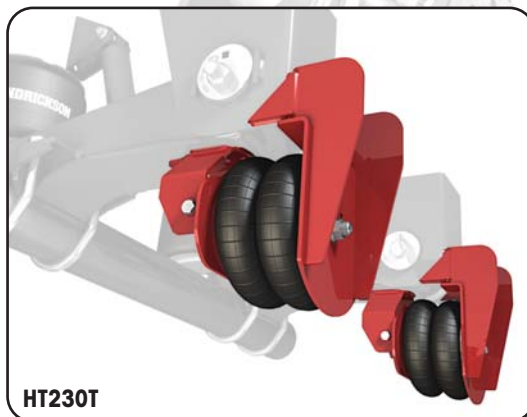

Put the power and efficiency of the UBL to work on your trailer applications

- Dumps
- Tankers
- Straight Platforms
- Drop-deck Platforms
- Loggers
- B-trains
- Specialty Trailers



For additional information, call **1-866-RIDEAIR** or visit our web site at **www.hendrickson-intl.com**.

 **HENDRICKSON**
The World Rides On Us®

Features and Benefits

Lightweight — At less than 60 pounds, the UBL™ is just half the weight of most other lift mechanisms on the market

Compact — The small package attaches easily to existing hangers and leaves plenty of room for auxiliary equipment

Durable — Manufactured with the same rugged craftsmanship that has made our suspensions the industry standard

User-friendly — Simple to install and operate and easy to retrofit on INTRAAX® and HT™ Series models


Low maintenance — With fewer moving parts than other lift products, UBL helps deliver years of trouble-free service

Product Family	Suspension Model	UBL Kit	Comments
INTRAAX	AANT 23K	UBL-004	Recommended for lifting in unloaded condition only
	AAT 23K AAT 25K AAT 30K	UBL-001	Recommended for lifting in unloaded condition only
	AANL 23K	UBL-005	Approved for lifting in loaded and unloaded condition
	AAL 23K AAL 25K AAEDT 30K	UBL-002	Approved for lifting in loaded and unloaded condition
	AAL 30K AAEDL 30K	UBL-003	Approved for lifting in loaded and unloaded condition; includes crossover valve
HT Series	HT230	UBL-001	Recommended for lifting in unloaded condition only
	HT250T	UBL-002	Approved for lifting in loaded and unloaded condition; 14" ride height and above
	HT300	UBL-001	Approved for lifting in unloaded condition only; 17" ride height and above

Note: Some UBL kits require a minimum axle-to-axle suspension spacing. Call Hendrickson for assistance.

Cutting-edge, integrated liftable system for INTRAAX and HT

Combine INTRAAX or HT Series with the Hendrickson UNDER BEAM LIFT for a state-of-the-art liftable system that adds real cost savings and operational flexibility.

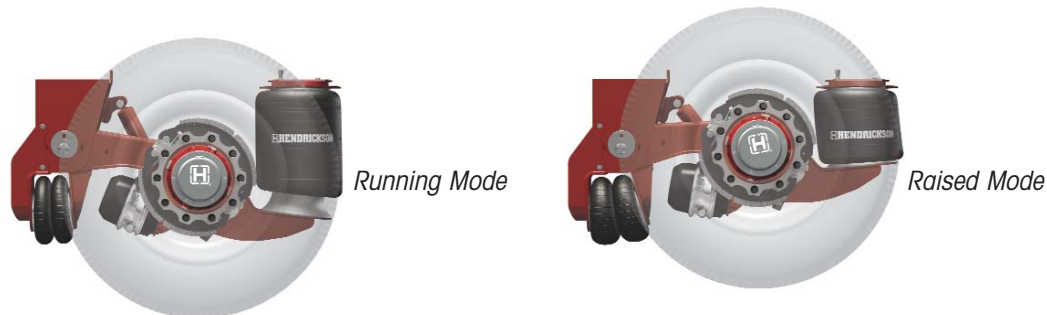

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.

Call your trailer dealer or Hendrickson at **1-866-RIDEAIR (743-3247)** for additional information.

www.hendrickson-intl.com



Trailer Suspension Systems
250 Chrysler Drive, Unit #3
Brampton, ON Canada L6S 6B6
905.789.1030
Fax 905.789.1033

Trailer Suspension Systems
2070 Industrial Place SE
Canton, OH 44707-2641 USA

866.RIDEAIR (743.3247)
330.489.0045
Fax 800.696.4416

Hendrickson Mexicana
Av. Industria Automotriz #200
Parque Industrial Sliva Aeropuerto
Apodaca, N.L., México C.P. 66600
+52 (81) 8288.1300
Fax +52 (81) 8288.1301