

PHILIPS

WE MAKE PRODUCTS THAT MAKE A DIFFERENCE™

ABS PERMACOIL™



Short Life Replacement

- ABS current carrying capacity
- Temperature rated at -87°F to 150°F
- Good recoil memory
- Oil, fuel and chemical resistant
- Good abrasion resistance
- With unbreakable PERMAPLUGS™ or zinc die-cast plugs

4/12, 2/10 & 1/8 ga. ABS Trailers

Part No.	Description	
30-4320	12', with 2 PERMAPLUGS™	*
30-4321	12', with 2 zinc die-cast plugs	*
30-4620	15', with 2 PERMAPLUGS	*
30-4621	15', with 2 zinc die-cast plugs	
30-4920	15', 48" lead with 2 PERMAPLUGS™	
30-4921	15', 48" lead with 2 zinc die-cast plugs	
30-4951	20', with zinc die-cast plugs	
30-4954	20', with QCP™ (Quick-Connect Plugs)	

* Working length - As measured by pull force per SAE J2222. Length of raw cable is significantly longer.

For new and innovative products, visit www.phillipsind.com
L-APC 02-03-11

12070 Burke Street, Santa Fe Springs, CA 90670
800.423.4512 Fax 800.597.7757


PHILIPS

www.phillipsind.com


QUALITY YOU CAN COUNT ON!



**Heavy-duty brass with
stainless compression ring**

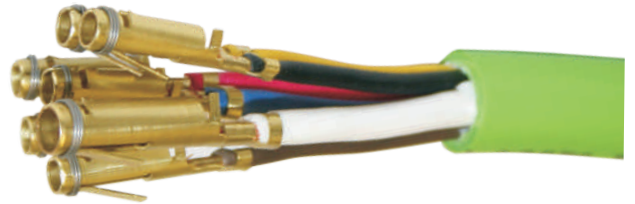

**Conductor and
insulation crimps**

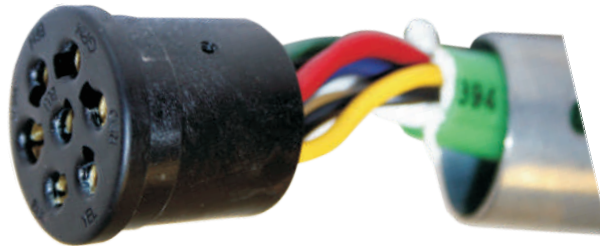

ABS - Tough!



**Unbreakable
PERMAPLUG™**



**Reinforced
Zinc die-cast**

For new and innovative products, visit www.phillipsind.com
L-APC 02-03-11

12070 Burke Street, Santa Fe Springs, CA 90670
800.423.4512 Fax 800.597.7757

PHILLIPS

www.phillipsind.com